

Arable soil management

Cultivation and crop establishment



Funded by
your levy

AHDB
ahdb.org.uk

Contents

- 3 Introduction**
- 4 Soil management factors**
- 11 Cultivation and crop establishment options**
- 23 Summary of approaches**
- 26 Establishment approach assessment tool**

With thanks to Andy Newbold and Philip Wright for contributing to this publication.

Photographic credits: Photographic images © Wright Resolutions Limited, except: Figure 2, 36, 37 © AHDB; Inside front cover © Gary Naylor Photography; Figure 4 (left) © Farming Photography; Figure 4 (right) © George Hosier; Figure 10 © Julian Gold; Figure 20 (top) © Lemken UK; Figure 25 (top) © Keith Challon (Belvoir Fruit Farms); Figures 25 (bottom) and 27 © Horsch UK; Figure 31 (left) © Grange Machinery.



Introduction

This guide covers the unique elements of soil management associated with cultivation and the establishment of combinable crops in arable systems. It builds upon the foundations laid in the AHDB Principles of soil management guide, which relates to any soil-based system. Specifically, this publication focuses on the practical elements that can be controlled, while working within the bounds of those things that cannot, such as weather and soil type.

Management strategies should focus on the development of healthy soils. Such soils are inherently more resilient and offer greater flexibility.

In this publication, sections on drainage, residues, cover and catch crops, trafficking and irrigation outline the major factors to consider in holistic soil management.

The publication also includes an overview of cultivation and crop establishment options and presents the strengths and weaknesses associated with each cultivation system.

Developed for use alongside this publication, the establishment approach assessment tool brings together the multiple factors required to make better soil management choices. It has been designed to help farmers review the effects of various factors on their soils, which – in turn – can indicate where a change in management approach might be beneficial. This can be done on a field-by-field basis, taking into account the crops in rotation, as well as across the whole farm.

For a soil to be healthy, its biological, chemical and physical components must be in balance. The AHDB guide **Principles of soil management** provides comprehensive information on healthy soils: ahdb.org.uk/soil-principles

Soil management factors

Cultivation choice cannot be prescriptive. Certainly, a single approach will not suit all situations. This section describes the key factors of soil management to consider when making cultivation and establishment decisions.

In this guide, 'cultivation' means any mechanical act to prepare or work soil to raise crops.

Many factors that influence soils are relatively fixed, such as climate (especially rainfall) and soil type. Nevertheless, it is critical to understand these factors because they often set boundaries and influence the optimum approach required. Other factors, such as trafficking policy and irrigation, are easier to influence.

Rainfall

Higher rainfall areas will require more management and drainage capacity. Soils in these areas are at greater risk of slumping. Shorter working windows will demand higher machine capacity, but not higher machine weight. Often, a solution is to work for long hours with lighter equipment. Drier areas are more forgiving, with wider working windows often being available.

Soil type

In terms of soil type, it is essential to understand the soil's natural capability to 'repair' or self-structure itself. Some soils, such as sands and silts that are prone to slumping, often benefit from mechanical intervention – even where cover crops are used. However, mechanical stirring of soil can compromise natural soil structure. It can compact and shear aggregates, fill pore spaces, and speed up the decay and oxidation of organic matter.

Often, self-structuring soils:

- Are well-drained
- Are composed of highly stable aggregates that can withstand breakdown (by water and wind)
- Have a calcareous loamy or clay loam texture
- Have good organic matter content and biological activity

Often, less well self-structuring soils:

- Are based on alluvial deposit, often high in sodium content
- Have significant sand or silt content
- Are low in calcareous content
- Are situated on steep slopes (especially in areas of high or highly concentrated rainfall)

Overworked soils are more prone to slumping and capping, particularly if the soil has high silt content. Repeated cultivation, especially at the same depth, also causes compacted zones that restrict water and root passage. The extent of damage depends on the type and severity of cultivation and the condition of the soil – whether wet or dry, hard, soft or loose.

Although intensively worked soils can cure short-term issues (for example, weeds and poor seed-to-soil contact), the approach is costly in terms of labour and machinery. The goal should be to adopt the least disruptive cultivation approaches possible. In particular, well-drained, heavy restructuring and – especially – light self-restructuring soils lend themselves to minimal or no-till cropping systems.

Management (requirements/capabilities)

Successful soil management requires attention to detail, flexibility in management and a solid knowledge of the longer-term implications of any change to practice. Management time pressures often dictate the amount of attention paid to detail: a reduction in soil movement requires closer attention to detail and crop husbandry skills available from the manager.

Drainage

Drainage is the cornerstone of good soil management. Well-drained fields rapidly remove excess water and reduce or eliminate waterlogging. Such fields return fastest to field capacity. Effective drainage requires an unbroken chain of water movement, from the ground surface to where it exits the farm. Freely draining land provides the widest window for effective cultivations and crop establishment. Frequently, headlands and field corners require the most attention.

The AHDB **Field drainage guide** outlines the basic principles of field drainage. It includes information about installation and maintenance. See ahdb.org.uk/drainage

Mole ploughing

Unlined channels formed in a clay subsoil, called mole drains, can improve natural drainage, as they conduct water to permanent pipe drains or open ditches. They are formed by dragging a 'bullet' (a cylindrical implement with a tapered nose) followed by an expander (a cylindrical plug with a slightly larger diameter than the bullet) through the soil to form a circular semi-permanent channel (Figure 1).



Figure 1. Mole drains are formed by dragging a 'bullet' followed by an expander through the soil to form a circular semi-permanent channel

Mole drains are particularly useful on heavy or calcareous clay subsoils that would otherwise require uneconomically closely spaced pipes. However, they are not suitable in areas of rising groundwater or in flood-prone fields.

For best results, soils should:

- Have a minimum of 30% clay and, ideally, have a gravel backfill above the installed pipework. Clay gives the soil the ability to hold together and reduces the chances of the channel collapsing after the mole is pulled
- Have a sand content less than 30%

Residues

Residue management influences the choice and extent of cultivations needed. The amount of crop residues on the soil surface after harvest depends on the crop. Some crops, such as legumes, sugar beet, oilseed rape and silage maize, usually leave few residues. However, cereals produce high levels of residues, with straw biomass approximately equal to grain yield.

There are often good reasons to remove residues, as they can cause management challenges (for example, unripe barley straw, which is hard to chop and spread) or have greater perceived value if removed (for example, revenue return from straw sales).

The sale of straw can produce useful revenue. However, removing organic material will lead to reduced soil organic matter. It can also make the soil more vulnerable to compaction, especially during wet conditions, which will require mechanical remediation. Organic matter levels can be maintained by cover crops or the addition of compost or farmyard manure (FYM).

Carefully plan straw removal (and how to adapt it), especially in wet conditions. See ahdb.org.uk/straw

Effective residue management starts with the combine – and is essential when considering reduced cultivations or direct drilling. Distribute residues as evenly as possible to provide a consistent seedbed for the next crop (Figure 2). Even distribution requires regular maintenance of the combine chopping and spreading system, including the static and rotating knives.



Figure 2. When straw is chopped, aim for an even spread to the full header width



Figure 3. Residue management after harvest: stubble mulcher (left), straw rake (middle) and shallow cultivator (right)

Where residues are not distributed evenly, additional operations may be required to process or spread straw and chaff (Figure 3). This can be advantageous where unripe straw is present. Raking or deeper tillage spreads residues and results in a shallow surface tilth for volunteer and weed germination. The weed species present will influence the extent and timing of stale seedbed cultivations.

Providing the system can cope, long stubbles (harvested by conventional or stripper header) can be left after combining to reduce the volume of loose residues. A direct drill can be used if soil type and condition are appropriate and the following crop is not compromised (Figure 4).

When cultivating or drilling into residues, adjacent tine clearance should be 1.5–2 times the chop length. Vertical clearance from the ground to the chassis or mounting should be 1.5 times the stubble height for minimal blockage. Disc-type machines are less exacting than this, but depend on the disc orientation and size. Some drills can also move loose residues clear of the seeding zone at the time of drilling, therefore, require less pre-cultivation.

Generally, incorporating FYM or other organic amendments improves soil properties. However, removal and spreading operations can result in damage, increasing the need for remedial actions. In such situations, take extra care to minimise ground pressures and associated trafficking effects. Organic amendments

may also require surface cultivation, other than when drilling. Regulations cover the incorporation of such materials and may influence the need for specific tillage operations.

Cover and catch crops

Where delayed autumn drilling or spring drilling is practiced, there is an opportunity to use cover and catch crops. Such crops offer multiple benefits, including improving soil structure and preventing erosion, as well as the capture of nutrients, carbon and water. Roots also support natural drainage and residues support earthworm populations. The decaying crop will also add to soil organic matter. It is important to understand what role the cover crop is intended to achieve, when and how it is to be destroyed and any pest or pathogen green bridge issues for the following crop.

Establishment and destruction of cover and catch crops is likely to require additional trafficking and cultivations.

Consider the following:

- **Soil texture** – Clays are better cultivated earlier, when soil conditions are usually drier. Slumping-prone sands and capping-prone silts are usually better cultivated later. Surfaces should be left as coarse as possible (i.e. without compromising establishment and herbicide efficacy) to control costs and the mineralisation of organic matter



Figure 4. Long, anchored stubbles left by stripper heading (left) can be drilled with a suitable direct drill. Note: requires effective chaff spread



Figure 5. Example of residue managers fitted ahead of drill coulters

- **Soil structure** – The soil structuring and moisture cycling capabilities of a cover crop can assist natural soil aggregation and self-structuring. In turn, this enables reduced disturbance drilling of the following crop, as naturally formed surface tilth can exist
- **Crop establishment** – Establish covers as early as possible to gain maximum benefit from sunlight and temperatures. However, ensure soil moisture is adequate for germination
- **Soil disturbance** – When establishing a cover crop (Figure 6), relatively high levels of surface disturbance can encourage grass weeds to germinate. Where weed seeds are left on the soil, moisture levels are often too low for germination
- **Crop management** – Careful choice of seed rates and how the crop is managed will avoid thick cover crop canopies. This will assist any wet/dry tilth-forming actions and allow grass weeds the space to germinate
- **Systems approach** – Long-term trial work has demonstrated that brassica cover crops in shallow non-inversion systems are more likely to give a positive yield response in the following crop than in plough systems

For more information on cover crops, visit ahdb.org.uk/cover-crops



Figure 6. Cover crop established into a stubble with a relatively high-disturbance tine drill (top). Main crop drilled into a cover crop with a low-disturbance, disc-based drill (bottom). Both drilling modules can be mounted on the same leading hopper

Trafficking

Where implement or drilling width is low, ground pressure and controlled-trafficking considerations become highly important. Typically, a 4-metre drill pulled by a tractor with 710 mm-wide tyres will traffic almost 40% of the area farmed – and potentially more, after headland turning has been taken into account.

Ground pressures

Ground pressures exerted by tractors and trailed machinery determine the severity of soil structure damage, which is largely caused by reduction in porosity. Appropriate choice of tyres and/or tracks can reduce damage associated with higher axle loads (equipment weight). It can also improve fuel efficiency and overall machine output. High axle loads push compaction deeper throughout the profile, which is harder to remedy. Consider the following.

- Determine the appropriate ballasted weight for each operation, including the split between front and rear axles on wheeled tractors. Tracked vehicles must also be ballasted appropriately, so the tracks are in even ground contact from the front to the rear. Correctly ballasted machines will maximise tractive efficiency and keep wheel/track slip low
- Trailed equipment allows the tractor to be optimally ballasted to pull the implement. Mounted equipment can require additional ballast to maintain stability on headland turns and for transportation. Poorly ballasted equipment increases risks of headland compaction from the rear axle and in-field compaction from the front axle
- Set tyre pressures once the ballasted weights are determined (Figure 7)



Figure 7: Use weigh cells to determine the maximum ballasted axle loadings for various operations. Once done, adjust tyre pressures accordingly. This is also important for the front tyres on half-tracked tractors, which can otherwise exert high pressures

- Tyre manufacturers will check and confirm safe operating pressures for a particular application. If any doubt exists, use these services
- Improved flex, very high flex and hyperflex carcass tyre technologies allow reduced pressures (and reduced ballasted weights) to be used. This, in turn, reduces applied stresses, slippage and compaction
- Usually, field pressures are lower than those used for the road. Central tyre inflation systems (CTIS) are available on some tractors for which road transportation speeds and loads require high pressures. This allows reduced field pressures to be easily controlled (Figure 8)

Estimate the risk of soil compaction from axle loadings at terrano.uk

Controlled-traffic farming (CTF)

Controlled-traffic farming (CTF) uses global positioning system (GPS) guidance and combines matched tillage and drilling widths. It puts cultivation, seed drill, combine harvester and crop sprayer passes into dedicated pathways. This minimises in-field wheel tracks and can reduce the area of soil damaged by heavy or repeated agricultural machinery passes on the land. Tillage, drilling and harvesting widths are exactly divisible into the sprayer width (for example, a 9-m cut combine and drill with a 36-m sprayer).

Avoiding random passes should be a matter of course, even when a 'full' CTF approach is not used. In most cases, adopting CTF reduces the need for cultivations, because fewer remedial actions are required.

Under CTF, only specific passes are required. In turn, specific passes to manage compaction in tramlines (for example, in-filling or loosening for drainage) or intermediate wheel-ways (for example, loosening or levelling) can be all that is occasionally needed. Consider the following:

- If required, loosen permanent tramlines, from either side, with staggered tines. This encourages moisture away from the middle of each wheeling and avoids 'wet' tramlines (Figure 9). This also forms a profile at depth to move water to the sides
- If possible, loosening intermediate wheel-ways should also be either side of the drill tractor wheelings. This helps to avoid re-consolidation when drilling follows loosening
- Remove non-permanent trackways by lifting directly down the track centres, as crop roots will grow in these areas in the following season
- Other surface indenting/lifting tillage units are available to promote water movement away from tramline centres and into the growing crop areas
- Unidirectional cultivations can lead to levelness issues over time. If an oblique pass is needed to manage inconsistencies of residues or in the ground surface, ensure this is carried out when the soil is dry and by using the lowest possible ground pressure and tractor weight

The combination of CTF with low ground pressures can reduce the need for remedial tillage and enable direct drilling, when appropriate.



Figure 8. Retro-fit central tyre inflation system (CTIS) options (left, top and bottom) and original-fit, fully integrated CTIS (right)

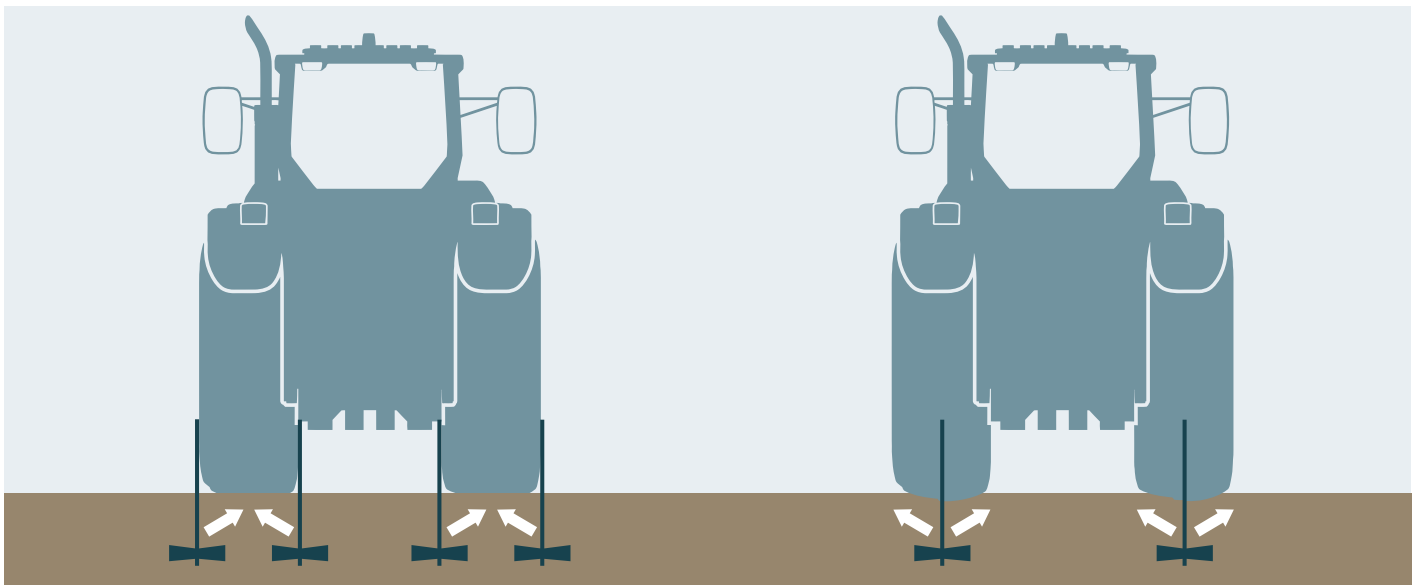


Figure 9. Loosen each side of permanent wheel-ways or along tracks



Figure 10. Controlled-traffic farming (CTF) provides many advantages

Irrigation

The free-draining soils often used for root crop production are easy to work. However, such soils are less likely to repair naturally or to self-structure. Regular irrigation on such soils can reduce soil particulate adhesion. It can lead to slumping, soil degradation, run-off and loss of soil structure. High levels of organic matter are also difficult to maintain.

Where irrigation is applied to poorly structured soils, keep soil moisture 20–30 mm below field capacity. Where bare soil is irrigated, keep the droplet size as small as possible (application rates not greater than 5 mm per hour) to minimise capping risk. Coordinate field operations so that soil moisture deficit (SMD) is greatest when working and steadily increase SMD when approaching harvest to allow harvesting operations.

Weeds

Cultivation is not just about crop establishment: it also changes weed populations. The gap from harvest to drilling provides several opportunities and benefits for weed management.

Annual meadow grass, rye-grass, brome and black-grass are difficult to manage in a reduced or no-till system, particularly in short windows between crops.

Inversion tillage can be used as part of an integrated weed management strategy, especially where herbicide-resistant grass weeds are present or when weed populations are high (with the exception of wild oats). The extent of seed burial and mixing influences weed numbers. Ploughing buries residues and surface weed seeds, such as black-grass or sterile brome. It can, along with deep cultivation, limit the effect of persistent herbicides to a following crop. However, subsequent ploughing will cause some weed seeds to resurface.

Use the plough alongside other appropriate tillage in response to the current situation and weed burden. For example, shallow cultivate generally (to minimise surface disturbance) and plough occasionally (once in every 5 years or more). High levels of surface disturbance mixes weed seeds throughout the profile. Some of these seeds can germinate and make control difficult in subsequent crops.

Pests






Short rotations, cloddy seedbeds and crop residues promote slug activity. Green bridge issues can host pests ready for a susceptible following crop. Develop a rotation to disrupt pest life cycles.

Direct drilling and delayed drilling increase the risk of slug damage. Open, damp and cloddy seedbeds allow slugs to move easily and provide more shelter than friable, frequently cultivated soils.

Seedbed preparation and quality are potentially more important than the chemical control of slugs, particularly in combinable crops. Ploughing is a good way to reduce slug populations, but even minimum tillage gives a considerable reduction in slug damage compared to direct drilling. Seedbed cultivations will increase mortality depending on machine action, soil type, cultivation timing, depth and intensity.

Firm seedbeds reduce slug activity because it is harder for slugs to move around and reduces the availability of safe resting places. A fine, consolidated seedbed protects seeds and prevents slugs from accessing seedlings before emergence. A consolidated seedbed provides good seed-to-soil contact and enables seeds to germinate quickly and grow rapidly through the vulnerable establishment stage.

Table 1. Cultivation options and effect on weed seedbank

Cultivation	After harvest	Plough	Deep till	Shallow till	No-till
Soil movement	Not applicable	Inversion	Deep	Little	No mixing
Cultivations depth (typical depths)	Not applicable	20–40 cm	20–35 cm	5–10 cm	None
Soil depth		Many old seeds brought to surface, most new seeds buried	Fewer old seeds brought to surface, some new seeds buried	Very few old seeds brought to surface, few seeds added to the seedbank	A few seeds may change layers
					
Weed control	Not applicable	Generally reduces weed populations	Has little effect on weed populations	Keeps weed seeds in top 5 cm of soil where they can germinate	Keep weed seeds in top 5 cm of soil where they can germinate

Cultivation and crop establishment options

Many factors influence the need to cultivate or restructure soils. These can include the need to create conditions for crop establishment and growth; to cope with pests, weeds and residues; or to alleviate compaction or consolidation. Cultivation costs depend on equipment, fuel and time used. All considerations must be balanced against effects on crop yield and quality, timeliness and long-term effects on the soil and the environment.

Any barrier in the soil that limits water, air and root movement can reduce yield. Often, a careful

combination of 'roots and metal' is the most efficient way to improve soil structure. Deep, vigorous root systems are more likely to develop in well-structured soils. This can then lead to a virtuous circle of improving soil quality.

In considering soil management options, it is worth bearing in mind that soil type and texture can play an important role in determining what is feasible and economically viable.

Basic principles of soil-metal interactions: moisture



Too dry to cultivate



Ideal for loosening

Ideal for cultivation



Too plastic except for moling

← Friable range →

Fundamental moisture principles govern the interactions between soil and metal for all forms of cultivation: deep, shallow or reduced. Soil moisture content should be assessed to ensure it is appropriate for cultivation. To assess soil moisture, use a ribbon test on a sample from the soil surface and at cultivation depth.

Consider the following:

- Avoid working the soil when plastic conditions are on the soil surface (to minimise traffic damage) and at cultivation depth (unless mole draining)
- Friable (crumbly) conditions are best for cultivations to break down clods into a seedbed
- Increased clod breakdown occurs when friable soil is firm or pressed
- Where soil is too dry to form a ribbon, clods do not tend to break down easily and moisture is usually insufficient for germination
- Moisture between friable and dry is best for soil loosening, where brittle, tensile failure is needed to create cracks or fissures

Figure 11. Fundamental moisture principles govern the interactions between soil and metal

Sub-surface restructuring, including subsoiling



Figure 12. Typical examples of tillage-based ‘pans’, or barriers to water and root passage, caused by repeated cultivations at the same depth

Dig through moist subsoil in a crop to identify potential issues (Figure 12). Compaction signs include:

- Obvious differences in soil moisture and root growth at any common depth
- Absence of visible porosity, including fissures and root channels (which should mainly extend in a vertical direction to allow free passage of water, air and roots)

Reassess any zone with signs of compaction after harvest, as roots can repair damage. Where damage remains, take remedial action.

A visual evaluation of soil structure (VSS) is a quick way to examine soil structure and identify constraints to production, including signs of compaction: ahdb.org.uk/vess

When loosening the soil, consider:

- Setting loosening tines to achieve vertical fissures through the compacted layers, with minimal disturbance of the profile
- Only loosening the affected area (for example, turning headlands or specific soil textures)
- Ensuring appropriate soil moisture levels at and above the loosening depth to ‘stretch’ soils and create vertical fissures (Figure 11 and Figure 14, left)
- Not loosening to depths greater than required and consider the actions of roots
- An increase in loosening depth of 5 cm, which can double the fuel use. Doubling loosening depth can quadruple the draft loads

- Avoiding the use of deep loosening wings with high lift at shallow depths – excessive soil movement and destabilisation of the profile can result
- Avoiding aggressive loosening actions that cause a loss of natural structure and aggregation at depth. In turn, loosened profiles can then rapidly re-consolidate, losing any beneficial effects
- Using reduced-disturbance actions to reduce mixing of weed seeds through the soil profile
- Establishing a crop as soon as possible through loosened soil to stabilise it
- Loosening through a cover or catch crop, if root growth appears restricted (Figure 13)



Figure 13. Soil loosening through a growing cover crop

Assess the impact of soil loosening on compacted layers (i.e. look for vertical fissures) and adjust settings, if required.

The following affect soil loosening:

- Geometry of loosening components (Figure 14) – steeper rake angles shear or compress, shallower angles lift and loosen (see also Figure 22)
- Vertical lift height of wings (too great) – structure is completely rearranged and natural column strength is lost. Examples include conventional, deep subsoilers with high wing lift operated at shallow depths
- Vertical lift height of wings (too little) – vertical fissures are not created through compacted layers. Examples include low disturbance looseners operated at subsoiling depth
- Tine design – forward inclined tines at the surface can reduce disruption
- Speed of operation – faster speeds imply reduced lift height is needed
- Pre-cultivations – reduce lifting requirements for following deeper tines. For example, shallow tillage ahead of loosening
- Leading discs (aligned to the tines) – can reduce surface disturbance and cut surface residues and roots, allowing these to pass by the tines most efficiently
- Rear roller action – determines the field finish and consolidates the soil profile to working depth. This maintains surface stability and minimises excessive oxidation of organic matter by closing the soil surface in a controlled manner

Where more lift is required for fissuring, aim to increase the length of the lifting parts (for more wing lift height), rather than their rake angle. Set the wing leading edge

below the depth of compaction by 2–3 cm and allow for local field variability. Where greater variations occur (for example, deeply compacted headlands), adjust the machine to the areas managed.

Do not reduce lift too much to achieve minimal surface disturbance. This can make restructuring ineffective. Check that vertical fissures, not a compressed channel, have been created throughout the compacted layers.

Low surface disturbance, allied to effective fissuring for depths between 15 cm and 30 cm, can usually be achieved by a grassland-type sward lifter operation (Figure 15). Curved or sideways-inclined legs can also be effective, especially in shallower situations, as the natural soil fissuring angle (from the point tip) is used for the leg to pass through cleanly.



Figure 15. A sward lifter

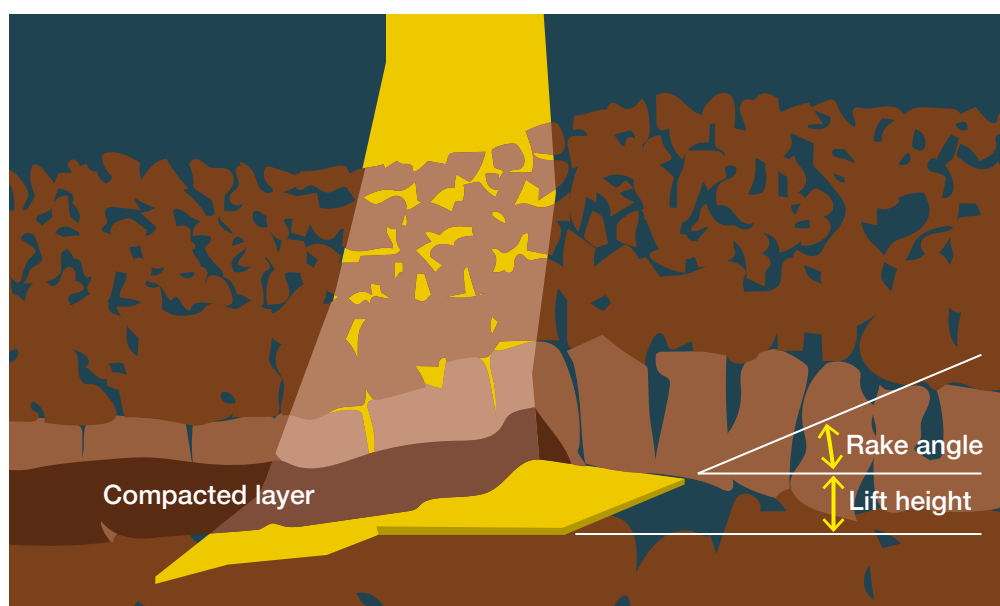


Figure 14. Geometry of loosening parts and minimal surface disturbance (left). Sufficient lift to create vertical fissures is needed at the problem depth. Low rake angles minimise surface disruption and heave, provided lift height is adequate for fissure creation. Sideways inclined legs (right) can also minimise surface disturbance, provided operational speeds are appropriate

Soil type influences soil loosening. Sandy soils loosen effectively when moist, unlike higher clay content soils. Leave silty soils, which are prone to capping and settlement and sandy soils, which are prone to slumping, until later in the year. This will help to avoid re-consolidation before roots can stabilise the soil.

Extremes of weather also affects the need for loosening (Figures 16–18). On shrinking clay soils, a dry season can produce effective fissures without needing deep cultivations. Here, shallow surface tillage to move small clods into such cracks will create more fissures when the soils swell. This creates a longer-term, stable series of natural cracks to assist root passage.



Figure 16. Shallow surface tillage places clods into shrinkage cracks



Figure 17. Natural cracks in a clay loam (left). A crack in damper, calcareous clay, partially closed by small clods after shallow surface discing (right)



Figure 18. Mechanically formed fissures subsequently direct-drilled and now stabilised by roots

Ploughing

It is necessary to plough some soils every year and others when conditions are unsuitable for reduced cultivations. Some soils do not need to be ploughed. The rotation also dictates the need to plough.

Timely ploughing can reduce compaction. It can also reduce capping and slumping on silty and sandy soils, as long as they are not overworked. Ploughing is often the most robust and expensive option, usually involving pressing and secondary tillage before drilling.

Although plough-based systems often produce good soil physical conditions in the short term, they can degrade soils over time.

Ploughing: best practice

A poorly planned ploughing operation wastes time and energy. It can also cause unintended soil damage. Ensure conditions, plough setting and timing are appropriate. Choose subsequent cultivations to suit the soil type, time of year and following crop. When ploughing, consider:

- Setting skimmers to effectively bury trash
- Controlling speed to produce the best finish
- Choosing a plough depth to suit the soil type, not tractor capacity
- Ensuring that the share width is less than the furrow width
- If and when to press
- Subsoiling where deeper loosening is needed
- Choosing whether to subsoil then plough, or plough then subsoil. Set the plough for effective burial and levelness for even settlement. Note: the subsoiler rear packer roll provides a secondary tillage and weather-proofing action, where this operation follows the plough
- Using loosening units on plough bodies (Figure 19) where soil depth and stone content are not limiting. Loosening can be on alternate bodies or each body, but should only be used where needed. Avoid plough body looseners where soil moisture levels at and beneath plough depth are plastic (Figure 11)

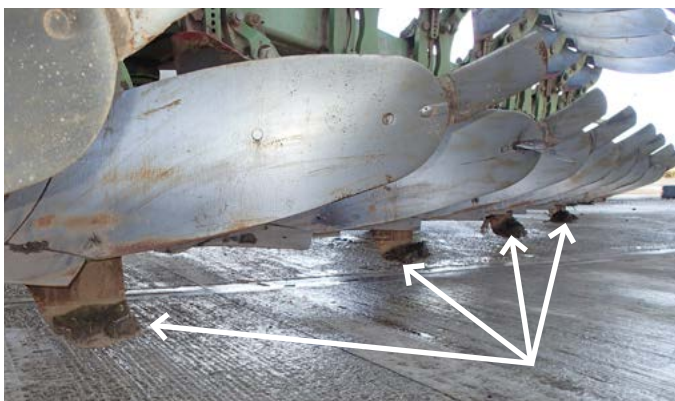


Figure 19: Looseners (see arrows) fitted to alternate plough bodies below the share depth

- A semi-mounted option, if choosing a large plough, to prevent excessive compaction on headland turns
- Pressing with or after ploughing – this has many advantages (Figure 20)



Figure 20. Pressing a ploughed field has many advantages

Pressing with or after ploughing

Pressing a ploughed field has many advantages. It:

- Consolidates soil to a depth that better supports traffic
- Increases bulk strength, which allows more efficient seedbed preparation and clod breakdown
- Can provide a 'halfway-to-a-seedbed' surface and make subsequent operations more efficient
- Reduces loss of organic matter through oxidation
- Allows management of the time delay for weathering. Note: set tyre pressures and axle loads as low as safely possible to avoid damage
- Gives a corrugated, weatherproof surface that is faster drying and takes moisture through more efficiently by capillary action

Ensure soil moisture is in the friable range and avoid pressing slumping-prone soils, unless drilling or planting is imminent.

Ploughing: weather considerations

Although worked soil can speed up drying, such soil has greater pore capacity and holds more rain. If dry soil is ploughed, it minimises structural damage and can drain quicker.

Early autumn-ploughed soil has more natural drainage channels and is usually drier in spring. The exception to this is on slumping-prone soils (such as silts and sands), which respond better to later ploughing, followed by immediate cultivation.

In high rainfall regions, especially in spring, ploughing immediately before cultivation and drilling often produces a better seedbed. This is because soil is drier in this zone when cultivating. Regional climatic effects, therefore, need careful consideration when looking at alternative establishment options.

Soils with high silt and clay content need operations to be very carefully timed. It can be impossible to achieve a satisfactory tilth on soils that are either too dry or too wet. This increases clod formation (and compaction risk in damper situations), especially after ploughing.

Ploughing wet soil can result in severe structural problems, especially if there is soil surface compaction from previous cropping. This causes soil to invert as a continuous slice, which can form an anaerobic layer at the plough-share depth.

If the tractor wheel runs in the base of the furrow, wheel slip can occur. This form of compaction is greater in wet conditions or with high draft forces. The plough share can also cause localised soil smearing when wet. This makes the plough-depth layer more resistant to water and root passage. Keep tractor wheels on the surface to reduce compaction (Figure 21), especially when using higher powered tractors (on-land, as opposed to in-furrow). Steering guidance can help.



Figure 21. On-land ploughing to minimise furrow-base damage, compaction and to assist bout matching

Combinable crops – reduced tillage

Reduced cultivations can lower costs, speed up operations and cause less soil damage. However, greater attention to detail is required, including soil assessment, soil consolidation, residue management and weed control. Timeliness and planning are vital. Reduced (non-inversion) tillage is best suited to stable structured soils. Clay or loam soils are particularly suitable, but there have been good results on light calcareous soils. On silty and sandy soils, capping and slumping may cause problems, particularly with direct drilling.

Provided that soil is structurally stable, the soil type is suitable, weather conditions are favourable and weeds can be managed, then reduced cultivation practices, including direct drilling may be suitable.

Reduced tillage soils are better able to resist and rebound from compaction than ploughed soils. Such soils also have a lower risk of soil erosion and run-off. Non-inversion systems can yield as well as – and may be more profitable than – ploughing. Wheat yields are relatively robust across different cultivation systems. However, for other cereals, the yield gains seen in Recommended Lists trials under plough systems may not occur under non-inversion systems because of variety x cultivation interactions.

Non-inversion tillage can promote the accumulation of key nutrients, such as phosphorus (P) and nitrate (NO_3^-), in the surface horizon (where most roots are and biological activity occurs). However, the lack of disturbance can acidify this horizon in the longer term.

If warranted, adjust drilling method, date or seed rate using reduced cultivations. Drill cereals at adequate (usually 4 cm) depth, ensuring good seed to soil contact.

Carbon sequestration

Research at long-term experimental sites found that, based on cultivation approach alone, reduced tillage did not increase the potential of soil to store carbon throughout its profile (60 cm). However, greater carbon content in the soil surface occurred in non-inversion treatments than in inversion treatments. If soils are not sampled to a sufficient depth, differences in carbon distribution could lead to wrong conclusions. Stone content must also be accounted for when assessing soil carbon.

To learn how to measure and manage carbon on your farm, visit: ahdb.org.uk/environment

Basic principles of soil-metal interactions: geometry



Low rake – lift/loosen



Intermediate rake – disintegrate

High rake – compress

Fundamental principles of geometry govern the interaction of soil and metal.

- Rake angle (the angle from the ground to the soil engaging part of a tool) largely determines the action on the soil
- Discs and rollers, plus wheels, have high rake angles and can cut or compress the soil and any residues on the surface. Compressive action in plastic conditions smears and compacts the soil. Such components work most effectively in dry to friable conditions
- Tines have high-to-low rake angles:
 - High rake angles can compress and disintegrate clods and minimise surface lifting and disturbance
 - Intermediate rake angles can sort and partially disintegrate clods, pushing them against the bulk strength of the soil ahead. Small aggregates or clods located here can be sorted into the larger gaps present. This creates an ordered tilth with few large open spaces
 - Low rake angles predominantly lift and loosen. This action raises soil upwards, putting it into tension where brittle failure or breakages create fissures or cracks. Aggressive lifting (at high speed or with intermediate-to-low rake angles) can cause high disturbance and leave a profile that is more prone to recompaction or slumping
- Low rake angle loosening is suited to dry, friable or slightly damp conditions with low risk of smearing, compared to high rake angle actions. Provided angles are low and speeds are not too high, surface disturbance is minimised and the soil structure retains many columns with vertical fissures between. This assists drainage and can support loads from above with less risk of recompaction

Figure 22. Fundamental principles of geometry govern the interaction of soil and metal

Deep non-inversion tillage

This technique gained popularity in the 1980s and 1990s as a low-cost alternative to ploughing. It developed acceptable conditions at depth and allowed weathered surface tilth to remain nearer the seedbed zone. It was used most frequently on medium and heavy soils in a cereals, pulses and oilseeds rotation (Figure 23). The advent of herbicide-resistant grass weeds and close rotations of cereals and oilseeds, with minimal or no spring cropping, meant detailed changes to such systems have been necessary.



Figure 23. Typical high disturbance, deep non-inversion mixing action

For effective deep non-inversion, consider:

- Identifying problem depths and working just below them
- Minimise surface mixing and manage residues, if appropriate for the following crop
- Using deeper soil structuring actions that protect the natural soil structure, when required. Actions must cause low surface disturbance, produce subtle vertical fissures and not full rearrangement of the profile at depth. Careful selection of loosening tine geometry can help
- That the technique can be effective in a broader rotation, including root or brassica crops, where regular ploughing is not the preferred option
- That some machines combine closer spaced discs for shallower surface residue mixing, have low surface disturbance loosening legs and a rear consolidating press roller (Figure 24). Where a looser finish is needed, depth control can be achieved by the roller, or combined with transportation wheels. Such machines are used where soil loosening is a regular requirement – as dictated by soil type, climate, or cropping, for example



Figure 24. Lower surface disturbance, shallower discing machine option

Two-pass alternative

Two separate operations can be used to selectively deep-structure: one for soil loosening (ideally low surface disturbance) and a second operation to surface-cultivate (before or following the loosening pass). Where possible, loosen after the surface cultivation to remove any adverse effects. The loosening pass can provide added surface cultivation by the rear roller on the loosener.

Shallow non-inversion tillage

Most often used where cereals, pulses and oilseeds are in a rotation, the technique requires the use of CTF and/or low ground pressure technologies to avoid deeper soil damage. The technique is suitable for self-structuring soil types, can help control slugs and forms stale seedbeds (where it is preferred not to leave weed seeds and volunteers on the surface to germinate).



Figure 25: Shallow non-inversion tine and disc-based machine options

For effective shallow non-inversion tillage, consider that:

- Effective residue management is essential
- Good consolidation after cultivations is vital to manage slugs
- Where there is a need for deep soil restructuring, these actions can be by a separate, targeted operation
- The shallow working machine can use tines or discs (or a combination), with depth controlled by the rear roller and, possibly, gauge wheels
- Discs have a high rake angle (Figure 22). They are most effective in drier conditions, and where residues can be high in volume or not finely chopped
- Discs with a wave format give a significant width of cut at very shallow depth and enable full width shallow cultivation (Figure 26)



Figure 26. Wave-type discs on a shallow non-inversion cultivator

Generally, tines have a lower rake angle than discs (Figure 22) and have a wider moisture window of effective operation with less smearing risk. Additionally, if spaced adequately, tines can cope with larger volumes of residues. Multiple rows (four or more) of narrow-tipped tines can move the surface to a shallow depth (Figure 27).

Wider-spaced tines, in fewer ranks with sweep or duck-foot type tips, result in a greater risk of smearing or shearing across the working depth in damper situations. However, they allow the use of a simpler, closer-coupled or shorter design of machine.



Figure 27. Shallow tine-type cultivator with multiple rows of narrow-tipped tines

Strip tillage

This technique cultivates the strip in which the crop grows, rather than the full field. In soils with reduced self-structuring capabilities, strip tillage provides a stepping stone to direct drilling, allowing some mechanical assistance.

Leaving parts of the field undisturbed saves money, retains support for future passes and protects drainage channels.

For effective strip tillage, consider:

- That row width tends to be wider
- That changes to inter-row spacing can affect grass weed competitiveness. Consider if the number of plants per square metre is adequate

- Residue management – the ability to move residues clear of the seeding zone, or to rely on the capabilities of the drill to work into such zones. Often, moving chopped and spread residues clear of the seeding zone is straightforward, given enough clearance between strip-tilled rows for residues to be moved into
- Specialised cultivation and drilling machines, which prepare and drill at different times or can be linked together, as needed (Figure 28)
- That any deeper soil structuring actions must be effective but not disruptive to natural soil structure. Actions must produce subtle vertical fissures and not a full rearrangement of the profile
- Zone-placed fertiliser as an option, if using appropriate tines in the strip cultivation units
- Timing of the tillage and drilling operations – crop and soil type/condition determines whether one (Figure 29) or two operations are needed
 - Two operations – where a spring-sown crop follows autumn strip tillage preparation
 - Two operations – where deeper tillage precedes drilling, this allows the deeper operation to be done earlier, in potentially drier soil to maximise effectiveness
 - One operation – where tillage and drilling are combined, ensure deep loosening is effective, especially in damper conditions (particularly associated with later drilling)



Figure 28. Specialised strip-till cultivation units prepare ground for later drilling



Figure 29. Dedicated all-in-one strip tillage drills

Limit sideways soil movement to the cultivated zones (Figure 30). This reduces risk of volunteers or weed seeds being encouraged inter-row and makes following rolling operations most effective in the seeded zones. Manage such disturbance by:

- Leading discs ahead of tine openers to minimise clods being hit head-on and thrown sideways
- Using low rake angle, shallow lift tine components or openers
- Using disc openers with limited sideways throw (for example, with side gauge wheels) or tine/banding openers with low disturbance capabilities
- Using border discs/side baffles to limit soil throw from the ground engaging parts
- Limiting speed of travel, especially with tine openers

Consider weed management inter-row, either by mechanical (weeder) or chemical (hooded sprayer) means. Companion cropping could also be considered for the zones between the strips. Slug risk can also increase because of the residues remaining in the uncultivated strips – the planted strip may become a ‘slug highway’.



Figure 30. Example of leading and side-border discs, with leading residue manager wheels

Combinable crops – one-pass systems

Direct drilling

Direct drilling is often seen as a natural progression after adoption of CTF and/or reduced ground pressure technologies, as these gradually reduce the need for remedial tillage. Similar progressions are reported following adoption of strip tillage.

Direct drilling means the drill alone is used without a prior cultivation pass of any type. Two types of drill can be used:

- Cultivator-type drill, where some soil movement is desired (for example, in slump-prone soils). These are predominantly tine-based

- No-till drill, where as little soil movement as possible is desired. These are predominantly disc-based. No-till is also known as zero-till

Most direct drills in the UK impose some form of tilth-making action in the seed zone. This is done by the openers alone (especially tine-based or disc-based openers with undercut and a seed placement boot or coulter), or by a leading element (for example, tine or disc – the discs are likely to be fluted).

For effective direct drilling, consider:

- Geographical location (including rainfall and topography)
 - Wetter regions, especially with shorter growing seasons, limit opportunities for the natural tilth-making actions that are needed in the absence of tillage
- That soil in good structural condition can be farmed with less remedial tillage
 - Direct drilling is easier to adopt in naturally self-structuring soils
 - Slump-prone soils rely on natural actions (for example, from plant roots, wet/dry and freeze/thaw cycles, stabilising residues and good levels of soil biological activity) to enable continuous direct drilling
- That poorly drained soils have limited windows for natural tilth-forming actions. They compact more easily and may require tillage as a corrective action
- Cropping and rotations – especially where root or vegetable crops are included and where spring crops are regularly grown
 - Direct drilling in spring relies on natural structuring actions to make tilth. Dense surface canopy cover can adversely affect such actions
 - Harvest damage and bed-forming actions (for example, that associated with root crops) can need cultivations to repair
- Weed burden – especially grass weeds. Tillage (especially consolidation) can help manage weeds with a non-selective herbicide
- That occasional strategic tillage may be justified to maximise gross margin (for example, through management of compaction, weeds or residual herbicide effects)

Other management considerations include:

- Specialist machinery requirements – it may be possible to use a flexible drill type or contractor services, as opposed to a specialist purchase
- Residue management – this affects how the crop grows through surface residues. Residue-managing units, allied to each opener, can sweep them clear of the drilled seeds
- Other drill designs, including a combined disc with side coulters (cross slot), manage the position of surface residues and the optimal placement of the seed

- Zone placement of nutrients (N and often P) may be necessary, especially in the first few years
- High levels of surface residue, which can reduce pH levels. pH needs balancing, especially in the surface zone

Direct drill selection

Drill design, including opener type and ground-engaging items (discs, tines or both), needs careful consideration to permit flexibility. Consider:

- Crop type, seed size and placement requirements (depth, spacing)
- Residues (ability to work in residues and avoid placing seeds in contact with residues)
- Soil condition (discs cut and consolidate, tines loosen or sort aggregates)
- Nutrient requirements (for example, need to supplement N and/or P)

Disc-based drills cope with high levels of surface residue. However, the design should avoid ‘hair-pinning’ high levels of residue into the seeding zone.

Other factors to consider include:

- That the risk of smear is greater from discs, especially in wetter conditions
- The total weight required for disc penetration (increases with disc size)
- Soil closing action – discs, which disturb and throw less soil than tines, need less remedial action to produce a level, consistent surface. Angled disc slots are closed by vertical pressure and vice versa

The opener design is critical. This includes the tilt angle of the disc, the drop tube position (relative to a single disc) and whether twin disc or triple disc openers are used.

If needed, many cultivator drills can be used as a direct drill (cultivation elements raised clear of work) or as a cultivator drill (Figure 31). This flexibility is useful when occasional tillage is required (for example, when ploughing ahead of potatoes, sugar beet or peas).

Tine-based drills can benefit from leading discs. These will cut residues and reduce disturbance. The detailed design of the opener, including its rake or lift angle, is important. This will determine soil movement and closing requirements.

Combining cultivations and drilling into one operation is another way of minimising passes and, in effect, directly drilling into the previous crop stubble



Figure 31. Combined structuring and drilling (top) and cultivator drill used as a direct drill with cultivation elements raised clear of work (bottom)

Direct drilling into standing straw stubble after a stripper header is another technique providing flexibility for establishment with minimal cultivations and soil disturbance. The drill, in all cases, needs to be suitable.

No-till

Also known as zero-till, no-till is associated with a low level of soil disruption. Its most powerful benefit is that it improves soil biological fertility, which can help make soils more resilient. The practice can also promote diversity and abundance of soil life. However, it is important to note that this can include an increase in organisms associated with plant diseases.

A farm's suitability for no-till is influenced by the climate, soil and crops. The approach requires thorough research on equipment choice and a high standard of crop and soil husbandry. No-till is more likely to be successful in stable-structured (compaction-resistant) soils, such as self-structuring calcareous clays, in lower rainfall areas. Good drainage is essential. However, the structure of sandy and sandy loam soils, especially if low in organic matter, may be unstable, thus may need occasional loosening.

In a no-till system, 30–100% of the surface is covered with residue and can reduce or eliminate soil erosion. The drill must penetrate the seedbed and place seed accurately without smearing. It also requires good seed-to-soil contact. Drills should be set to ensure that crop residues and planted seeds are not in close proximity. Otherwise, this can increase fungal contamination in wet conditions and delay germination as a result of poor seed-to-soil contact in dry conditions. If seed-to-soil contact remains unsatisfactory after drilling, consider rolling to lessen the risk of crop failure.

Aggregates and soil above the seed determine the depth of seed placement and, critically, evenness of emergence. Soil cover also forms a barrier to seedbed-applied herbicides. After drilling, consolidation is important.

The presence of crop residues keeps the soil cooler and wetter than bare ploughed soil. This can result in delayed drilling of spring crops. Crop residues on the soil surface can affect the drilling operation and reduce the evaporation of water from the surface.

No-till can give annual yields of combinable crops within 5% (above and below) of those after ploughing, but there is greater seasonal variability in yield. Yields are most variable in the first few years of a no-till system. Immediately after adopting no-till, crop yields may be appreciably lower than after ploughing, but tend to increase as soil structural conditions improve. With no-till, soils with poor drainage and weak structure generally give lower yields than after ploughing.

Potential yield-reducing factors in no-till systems include:

- No incorporation of crop residues
- An increase in grass weeds and volunteers
- Topsoil compaction from previous harvest traffic before soil strength and bearing capacity has increased, especially when associated with poor drainage
- Limited time for the build-up of soil structure-improving factors (for example, accumulation of organic matter)
- Reduced N availability
- Increased levels of slug damage

Changes to soil properties under no-till include:

- Accumulation of organic matter near the soil surface and increased structural stability (resistance to erosion and mechanical actions) and biological activity. After several seasons, this may lead to a reduced N requirement
- Improved self-structuring at the surface, especially when calcareous, as well as greater water permeability. The lack of disturbance causes bulk density to increase in the top 25 cm of soil. This can give a wider window for field work, but can also lead to poor aeration and cooler, wetter conditions at the surface. Changes in some properties after the introduction of no-till may be seen within a few

months (bulk density, soil strength) or take several years (organic matter levels)

- Acidification at the soil surface as a result of direct drilling. The pH of the surface soil can decrease to the extent that it contributes to further soil structural deterioration and limits plant productivity
- Reduced likelihood of soil erosion and run-off with loss of particulate P, attributed to the lack of soil disturbance and presence of crop residues. Direct drilling is, therefore, a good means of reducing the risk of nutrient losses by run-off from slopes adjacent to freshwater bodies that are prone to eutrophication. However, the content of phosphate may increase near the surface, leading to risks of nutrient loss if run-off ever occurs

Broadcasting

This is a means of establishment of cover/catch crops and crops with small seed (for example, oilseed rape) directly with or before the combine (Figure 32).

For effective broadcasting, consider:

- Ensuring that residues are evenly chopped and spread, as thick accumulations cause uneven establishment
- That yield can be affected by compromised establishment; nutrient availability/lock-up; and increased slug, disease or carry-over pressures
- The risk of residual herbicide from the previous crop – this may dictate the choice of cover species capable of establishment and the need for cultivations
- Compaction caused at harvest – use CTF and options to minimise ground pressures
- Restructuring soil after establishment, if establishing a cover or catch crop, if conditions are suitable and disturbance is managed
- Broadcasting into the previous crop, which maximises the time for a catch, cover or conventional crop to grow. Such benefits are critical when harvest is delayed or resources are limited. If broadcasting a mix, be aware that heavier seeds travel further from a disc-based spreader than lighter ones. Boom-type spreaders are ideal



Figure 32. Combine-mounted distributor

Summary of approaches



Plough (inversion)

Summary

- Viewed as a ‘conventional’ cultivation
- Inversion and burial of surface residues
- Plough depths vary (15–40 cm)
- Typical depths are 20 cm and 40 cm
- Subsequent cultivation passes are often used to condition the soil

Pros

- Gives a residue-free surface and a ‘clean start’
- Buries weed seeds below emergence depth
- Enhances biological breakdown of residual herbicides
- Loosens compaction down to plough depth
- Mineralises nutrients for availability in the following crop
- Option of pressing (flexibility to suit conditions)
- Capable of operation in wetter conditions than other systems

Cons

- The residue-free surface can be prone to slumping
- Can return buried weed seeds, if ploughing is frequent
- Oxidises organic matter, which reduces soil resilience
- High soil disturbance destroys natural supportive structure
- Risk of mineralised nutrients being lost to the atmosphere
- Pressed soil can slump and loose soil can lose moisture
- High cost, low output (relative to some other options)

Deep non-inversion

Summary

- Deep soil movement
- Typical depths are 20–35 cm
- Crop residues mixed into the top soil. Usually, moved to depth, unless low surface disturbance loosening is used in combination with shallow surface mixing

Pros

- Retains the natural soil profile (surface tilth and subsurface structure)
- Removes subsurface compaction
- Enhances biological breakdown of residual herbicides
- Mineralises nutrients for availability in the following crop
- Pressing as part of the operation gives a weatherproof finish
- Often lower cost than ploughing, if all operations are accounted for
- Combined deep and shallow operations in one pass

Cons

- Relatively high soil movement can compromise structure resilience
- Mixes weed seeds through the profile (uncontrolled emergence can result)
- Some risk of mineralised nutrients being lost to the atmosphere
- Can leave a firm surface prone to slumping
- High cost compared to less intrusive systems
- Less flexibility, if deep tillage is not required on some areas
- Usually reliant on rotations and/or chemicals for weed control

Shallow non-inversion

Summary

- **Shallow surface movement**
- **Typical depths are 5–10 cm**
- **Most crop residues remain on the soil surface**
- **Can be combined with low surface disturbance loosening (as a separate operation)**
- **Uses discs or tines**

Pros

- Retains the natural soil profile (surface tilth and subsurface structure)
- Leaves residues on or near the surface shallow mixed (stale seedbed)
- Associated control of slugs by shallow tillage and consolidation
- Pressing as part of the operation gives a weatherproof finish
- Low cost, high output
- Removes compaction, if combined with low-disturbance loosening

Cons

- Needs a well-structured subsurface to prevent barriers
- Disc-based option good in residues. Tine-based action can block – requires adequate tine clearance
- Disc-based option can smear in damp conditions
- The above can imply compromise, depending on conditions and season
- Needs a drill capable of operating in high residues
- If combined with loosening, more passes are required
- Often reliant on rotations and/or chemicals for weed control

Strip tillage (non-inversion)

Summary

- **Combines tillage (typical depths are 5–10 cm) and drilling, if needed, in strips* (as opposed to the entire field)**
- **Specialist drill having leading cultivation elements**
- **Most crop residues remain on the soil surface**

*Can be considered a form of direct drilling

Pros

- Combines the soil-drying and warming benefits of conventional cultivations with the soil-protecting advantages of no-till
- Works on a proportion of the field (reduces overall soil movement)
- Increased efficiency, while allowing tillage (as required)
- Retains undisturbed soil columns to support traffic and drainage
- Can be split into cultivation and drilling, in some cases, for flexibility
- Option to place fertiliser in drilling zone can save input costs
- Can provide a stepping stone to no-till or direct drilling
- Potential for companion cropping between strips

Cons

- Different surface conditions/residue levels can increase threats of slugs and carry-over of certain diseases
- Gives different surface conditions for weed and pest control measures
- Higher draft than shallow tillage (although less than full-width tillage)
- Care required to avoid throwing disturbed soil on uncultivated strips (limit speeds)
- Can be limited for deeper operation (e.g. in high moisture situations)
- Higher levels of residues imply zone placement of fertiliser is needed
- Residue manager options can be required to give clear drilling zones
- Often reliant on rotations and/or chemicals for weed control

Direct drilling (non-inversion)

Summary

- **Crop established in one pass, direct into land without prior cultivation**
- **The operation often uses some form of cultivation (e.g. to loosen topsoil before seed placement), followed by rollers to firm the soil**
- **Typical depth is 5 cm. Where no soil movement occurs, it is 'no-tilled'**
- **Uses either a specialist drill or a cultivator drill combined with loosening tines**

Pros

- A single pass system with flexibility for some cultivation
- Allows appropriate mix of tillage and drilling on soils needing both
- Low cost of operation (other than capital outlay)
- Reasonable/high output
- Low disturbance for weed management and, as needed, some structuring
- Over time, soil structure and biological activity improves

Cons

- Needs effective residue management and, ideally, good soil structure
- Ideally, needs tilth to be present for the following crop
- Specialist kit, although can be based around a cultivator drill
- Residue manager (row sweep) options can be required to give clear drilling zones
- Higher levels of residues combined with minimal soil disturbance imply zone placement of fertiliser can be needed
- Allow for restructuring, if needed, even as a separate pass
- Generally reliant on rotations and/or chemicals for weed control

No-till/zero-till (non-inversion)

Summary

- **Crop sown directly into previous crop's stubble without any prior topsoil loosening**
- **Specialist operation that often uses a disc to cut a slot in the soil, in which the seed (and fertiliser) is placed. Following press wheel(s) close the slot**
- **Sometimes referred to as direct drilling**

Pros

- A single pass system that requires adequate structure (tilth and subsurface)

- Reduced overall costs (fuel and machinery)
- No other operations – simple to manage in suitable conditions
- Soil structure and biological activity gradually improves (especially earthworm numbers)
- Successfully used by some farmers on appropriate soils
- Opportunity to increase area of autumn-sown crops
- High work rates and area capability
- Drilling phased to take advantage of favourable weather conditions
- Stones not brought to the surface
- No compaction below plough furrow
- Reduced erosion, run-off and loss of particulate P
- Better retention of soil moisture in dry areas

Cons

- Needs effective residue management and good soil structure
- Usually needs a specialist, high-cost kit
- Can require careful residue management when drilling (row sweeps)
- All tilth needed for the following crop needs to be naturally made
- Needs good weather and, often, patience to create good tilth. Can impose high demand on management where soils are variable
- Drill slot closure can be problematic in certain soils and moisture levels
- High levels of surface residues imply a disc is needed somewhere
- Higher levels of residues combined with minimal soil disturbance imply zone placement of fertiliser is needed
- Generally reliant on rotations and/or chemicals for weed control
- Unsuitable to poorly drained or poorly structured soils, especially sandy or high silt content soils
- Increased variability of crop yields, especially in wet seasons
- Crop establishment problems during very wet or very dry spells
- Increased grass weed control problems and heavy reliance on herbicides
- Increased slug damage
- Increased risk of topsoil compaction
- Problems with eradicating residual plough pans
- Risks of increased nitrous oxide (N₂O) emissions and leaching of dissolved reactive P
- Unsuitable to incorporation of solid animal manures
- Increased risk of fusarium deoxynivalenol (DON) mycotoxins

Establishment approach assessment tool

A change in cultivation approach does not necessarily mean going from one extreme to the other. Tillage operations cover varying degrees of soil movement, from relatively little disturbance to complete inversion.

Use this tool to consider the soil management factors and their importance to your unique farming situation. The scores produced are for guidance only. Use them to identify where improvements could be made across your farming system. Where possible, adapt management to achieve higher scores.

A managed approach means that you can adapt your cultivations (as required) on a rotational basis, basing your decision on soil/weather conditions, previous cropping, weed burden and soil assessments. A managed approach has been shown to result in more consistent yields and greater gross margins over the longer term.

The most appropriate establishment option depends on many other factors (for example, machinery availability).

Before considering reduced cultivations:

- Determine if the soil type is suitable
- Do your research: visit other farms using reduced tillage
- Start with fields where soil structure and drainage are in a good state
- Assess how often reduced cultivations may have been appropriate over recent seasons
- Carefully assess whether soil and weather conditions are suitable each season
- Be flexible: change back, if conditions dictate
- Manage trafficking and ground pressures: minimise the impact of heavy equipment
- Ideally, carry out all cultivations on friable, workable soil
- Soil-loosen, if necessary. Grow roots through the soil, whenever possible, to stabilise structure
- Assess current system and equipment needs compared to those needed for reduced cultivations
- Change to a new system in a planned manner. Soil type will often choose your system for you
- Consider machinery-sharing, contracting or trading in some existing machinery to fund reinvestment

How to use the tool

Either use the paper-based tool (on page 27) or the online tool at ahdb.org.uk/arablesoils

For each of the factors, select a score (range 1–10) and enter it into the appropriate 'score choice' cell.

Note: Although some scores are defined, any score (range 1–10) can be selected.

Total score – establishment options: combinable crops/leys

- <60 Varied approach required, with occasional inversion tillage
- 60–70 Aim to reduce tillage (option to strip-till possible)
- >70 Aim to significantly reduce tillage (option to direct drill, when appropriate)

Total score – establishment options: potato, root and field vegetable crops

- <55 Conventional approach often required, but varied in response to season/conditions
- 55–65 Aim to reduce tillage (intensity) and depths for subsoiling, ploughing, bed tillage and separation depth
- >65 Aim to reduce tillage (operations and intensity) and depths for subsoiling, ploughing, bed tillage, separation depth and declodding

Page	Factor	Factor score choices										Score choice
		1	2	3	4	5	6	7	8	9	10	
4	Rainfall	Annual rainfall >1250 mm		Annual rainfall 1250–950 mm		Annual rainfall 950–650 mm		Annual rainfall <650 mm				
	Soil type	Slumping-prone sands and silts		Soil varied; some non-structuring		Heavy soil; self-structuring		Light/medium soil; self-structuring				
	Management (time available)	Prescriptive/ little time		Prescriptive/ some time		Flexible/little time		Flexible/ good time				
	Drainage	Drainage issues common		Some drainage issues		Well drained, low permeability		Freely drained, permeable				
5	Residues/ organic matter	Residues removed and no organic matter returned		Residues removed and FYM or other organic amendments returned		Some residues removed, no organic matter returned		All residues remain and are well-managed; FYM or other organic amendments also returned				
6	Cover/ catch crop	Not used		Experimenting		Some used		Widespread use				
7	Trafficking policy	No controlled traffic farming High-pressure tyres used		No controlled traffic farming Low-pressure tyres used		Some controlled traffic farming Low-pressure tyres used		Fully controlled traffic farming Low-pressure tyres used				
9	Irrigation	Regular irrigation						No irrigation				
10	Weeds	High pressure (annual meadow grass, rye-grass and brome)		High black-grass pressure		Borderline manageable		Manageable with rotations				
	Pests	General pest risk		Slug risk high		Slugs manageable		Slugs controlled				
Total score												

Further information

Other publications from AHDB

- Field drainage guide
ahdb.org.uk/drainage
- Arable soil management guide
ahdb.org.uk/arable-soils or
Principles of soil management
ahdb.org.uk/soil-principles
- How to record soil health
ahdb.org.uk/scorecard
- How to count earthworms
ahdb.org.uk/earthworms
- How to assess soil structure with VESS
ahdb.org.uk/vess
- Nutrient management guide
ahdb.org.uk/rb209

Visit ahdb.org.uk to:

- Access GREATsoils resources
ahdb.org.uk/greatsoils
- Find resources on our knowledge library
ahdb.org.uk/knowledge-library
- Listen to our podcasts
ahdb.org.uk/podcasts
- Visit farm events and agricultural shows
ahdb.org.uk/events
- Contact your local knowledge exchange manager
ahdb.org.uk/meet-the-team

Produced for you by:

AHDB

Middlemarch Business Park
Siskin Parkway East
Coventry
CV3 4PE

T 024 7669 2051

E comms@ahdb.org.uk

W ahdb.org.uk



If you no longer wish to receive this information, please email us on comms@ahdb.org.uk

Scan the QR code to sign up to receive the latest information from AHDB, update your preferences and receive important updates or visit preferencecentre.ahdb.org.uk

AHDB is a statutory levy board funded by farmers and others in the supply chain. Our purpose is to be a critical enabler, to positively influence outcomes, allowing farmers and others in the supply chain to be competitive, successful and share good practice. We equip levy payers with easy-to-use products, tools and services to help them make informed decisions and improve business performance. Established in 2008 and classified as a Non-Departmental Public Body, AHDB supports the following industries: meat and livestock (Beef, Lamb and Pork) in England; Dairy in Great Britain; and Cereals and Oilseeds in the UK. For further information visit ahdb.org.uk

While the Agriculture and Horticulture Development Board seeks to ensure that the information contained within this document is accurate at the time of printing, no warranty is given in respect thereof and, to the maximum extent permitted by law, the Agriculture and Horticulture Development Board accepts no liability for loss, damage or injury howsoever caused (including that caused by negligence) or suffered directly or indirectly in relation to information and opinions contained in or omitted from this document.

© Agriculture and Horticulture Development Board 2025. All rights reserved.

